Beacon Light

Technical Specifications:
* working voltage: 3v ~ 12v
* current: 40mA (max.)
* 3 wires connections
* 10+1 patterns to select

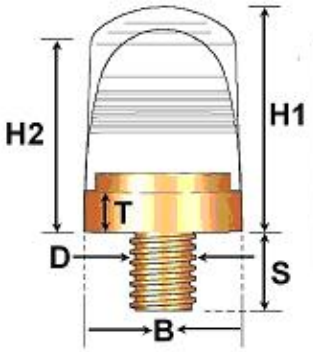

	1/16	1/14	1/10
H1	14.0	15.0	18.0
H2	13.5	14.5	17.5
T	3.3	3.6	5.6
S	6.0	6.0	6.0
B	11.0	12.0	13.0
D	M5/4.3	M5/4.3	M5/4.3
all measurements in mm			

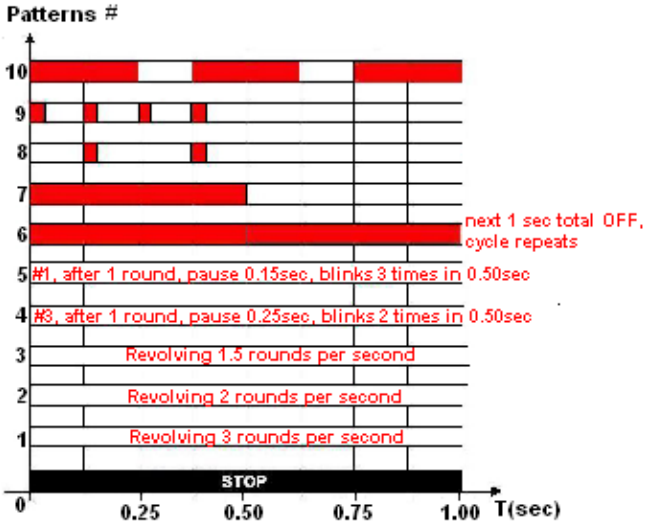

Comes in
- **3 colors: RED, AMBER, BLUE**
- **3 scales: 1/16, 1/14, 1/10**
- **2 Covers: Flat, Round**
- **2 Bases: M5 (nut included)**
  Pole (30~35mm brass tube included)

Usage Notes:
* **Not for kids, small parts will choke if swallowed**
* **Use voltage as stated**
* **This is not a water proof unit**
* **For stable operation, use direct from battery**
* **When Customers decided to use power source else where to power unit, example BEC, radio receiver, etc, you must ensure that your system (cars, trucks, kits, etc) is well "cleaned from signal interference" signal noise and/or interference will affect to change the patterns**
* **Touch GREEN wire to BLACK wire to change pattern**
* **Do NOT touch the GREEN wire to the RED wire, it may damage the unit.**
* **Do NOT attempt to open the unit.**

* **For video demonstrations, go into youtube, and search for "IMPACT Upgrades"**

* **For more information, go into facebook search for "IMPACT Upgrades"**